



CREPINES

AISI 304

Ref. 213A-SLB / PN 10-16



Application

Water & wastewater systems.
Seawater applications.
Pumping stations.
Tanks & Reservoirs.
Chamber installation.
Pipelines.
Water treatment plants

Approvals/Standards

Connection EN 1092-2 for flanged DN.
Perforated plate DIN 24041.

Range

DN40-1600

GENERAL CHARACTERISTICS

Sizes DN40 to DN1600
Wafer connection up to DN500.


WORKING CONDITIONS

Pressure ratings: Up to 1.6 Mpa.
Working temperature: -30°C + 220°C.
Flow media: Potable water, neutral liquids and sewage.



Nº	ITEM	MATERIAL
	Flange	AISI 304
	Basket	AISI 304

Components may be replaced with materials of equivalent or superior grade without prior notice, in accordance with our continuous improvement policy.

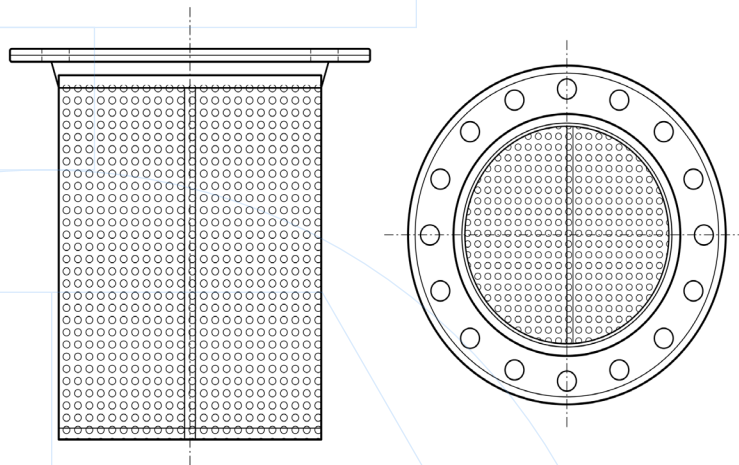

DN	Flange thickness	Flange outside diameter	Screen height	Screen diameter	Screen thickness	Hole diameter	Connection
40	4.8	84	60	35	3	3	WAFER
50	4.8	94	80	40	3	3	
65	4.8	114	100	50	3	3	
80	4.8	132	120	65	3	3	
100	7.5	152	150	80	3	3	
125	7.5	182	175	100	3	3	
150	7.5	205	200	125	3	3	
200	7.5	262	250	150	3	5	
250	7.5	316	300	200	3	5	
300	7.5	370	350	250	3	5	
350	7.5	420	400	300	3	5	FLANGED
400	7.5	470	400	350	3	5	
450	7.5	575	500	400	3	5	
500	7.5	700	500	450	3	10	
600	7.5	840	500	500	3	10	
700	7.5	975	500	600	4	10	
800	7.5	1075	500	700	4	10	
900	7.5	1195	500	800	4	10	
1000	7.5	1230	500	900	4	10	
1100	7.5	1375	500	1000	4	10	
1200	7.5	1415	500	1100	4	10	
1300	7.5	1525	500	1200	4	10	
1400	7.5	1675	500	1300	4	10	
1500	7.5	1755	500	1400	4	10	
1600	7.5	1915	500	1500	4	10	



CONTACT US

DAVINCI VALVES ORDER REQUEST

Ref. 213A-SLB / PN 10-16



Head Office CHENGDU

Room 3208 Unit 1 Building 1,
No. 6 Zhiquan Section, Dongda Street
Jinjiang District, Chengdu, Sichuan
CHINA

+86 17340168233 +86 19302892712
valves@davincivalves.com

Europe Office MADRID
SPAIN
zuzana@davincivalves.com

WEBSITE

davincivalves.com

YOUR QUALITY WATER PROJECTS PARTNER
For professionals who look for more.